


FRB-50F PTFE & FRB-40F PTFE 翻边规格及公差  
 FRB-50F PTFE & FRB-40F PTFE Specification & Tolerance

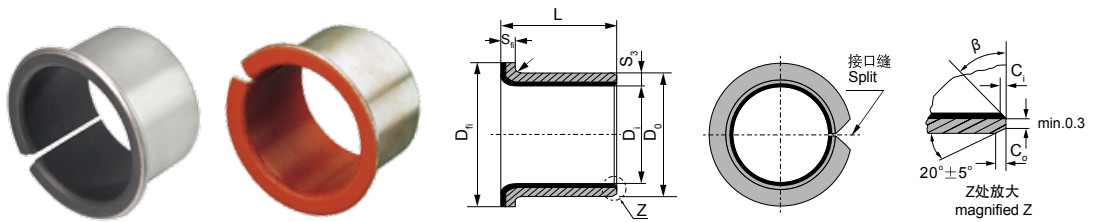

内外倒角 ID and OD chamfers

$S_3$	1.0	1.5	2.0	2.5
r	$1^{0.5}$	$1 \pm 0.5$	$1.5 \pm 0.5$	$2 \pm 0.5$

单位Unit: mm

轴径(f7) Shaft $D_s$	座孔(H7) Housing $D_H$	(OD) 外径公差 Tolerance $D_o$	(ID)压装后 内孔公差 After fixed $D_{i,a}$	配合间隙 Clearance $C_o$	Wall thickness 壁厚 $S_3$	尺寸 Dimension					
						$D_i$	$D_o$	$D_H \pm 0.5$	$L \pm 0.25$	$S_H - 0.2$	
6 -0.013 -0.028	8 +0.015	8 +0.055 +0.025	6.055 5.990	0.077 0.000	1.005 0.980	6	8	12	4	1	
									7		
8 -0.013 -0.028	10 +0.015	10 +0.055 +0.025	8.055 7.990	0.083 0.003		8	10	15	5.5		
									7.5		
10 -0.016 -0.034	12 +0.018	12 +0.055 +0.025	10.058 9.990	0.086 0.003		10	12	18	7		
									9		
									12		
12 -0.016 -0.034	14 +0.018	14 +0.065 +0.030	12.058 11.990	0.092 0.006		12	14	20	7		
									9		
									12		
14 -0.016 -0.034	16 +0.018	16 +0.065 +0.030	14.058 13.990			0.095 0.006	14	16	22		12
											17
15 -0.016 -0.034	17 +0.018	17 +0.065 +0.030	15.058 14.990		0.112 0.010	15	17	23	9		
				12							
16 -0.016 -0.034	18 +0.018	18 +0.065 +0.030	16.058 15.990	0.126 0.010	16	18	24	12			
								17			
18 -0.016 -0.034	20 +0.021	20 +0.075 +0.035	18.061 17.990	0.135 0.015	18	20	26	12			
								17			
								20			
20 -0.020 -0.041	23 +0.021	23 +0.075 +0.035	20.071 19.990	0.135 0.015	20	23	30	11.5			
								16.5			
								21.5			
22 -0.020 -0.041	25 +0.021	25 +0.075 +0.035	22.071 21.990	0.126 0.010	22	25	32	15			
								20			
								21.5			
25 -0.020 -0.041	28 +0.021	28 +0.075 +0.035	25.071 24.990	0.126 0.010	25	28	35	11.5			
								16.5			
								21.5			
30 -0.025 -0.050	34 +0.025	34 +0.075 +0.035	30.085 29.990	0.135 0.015	30	34	42	16			
								26			
35 -0.025 -0.050	39 +0.025	39 +0.085 +0.045	35.085 34.990	0.135 0.015	35	39	47	16			
								26			
								26			
40 -0.025 -0.050	44 +0.025	44 +0.085 +0.045	40.085 39.990	0.135 0.015	40	44	53	26			
								40			